

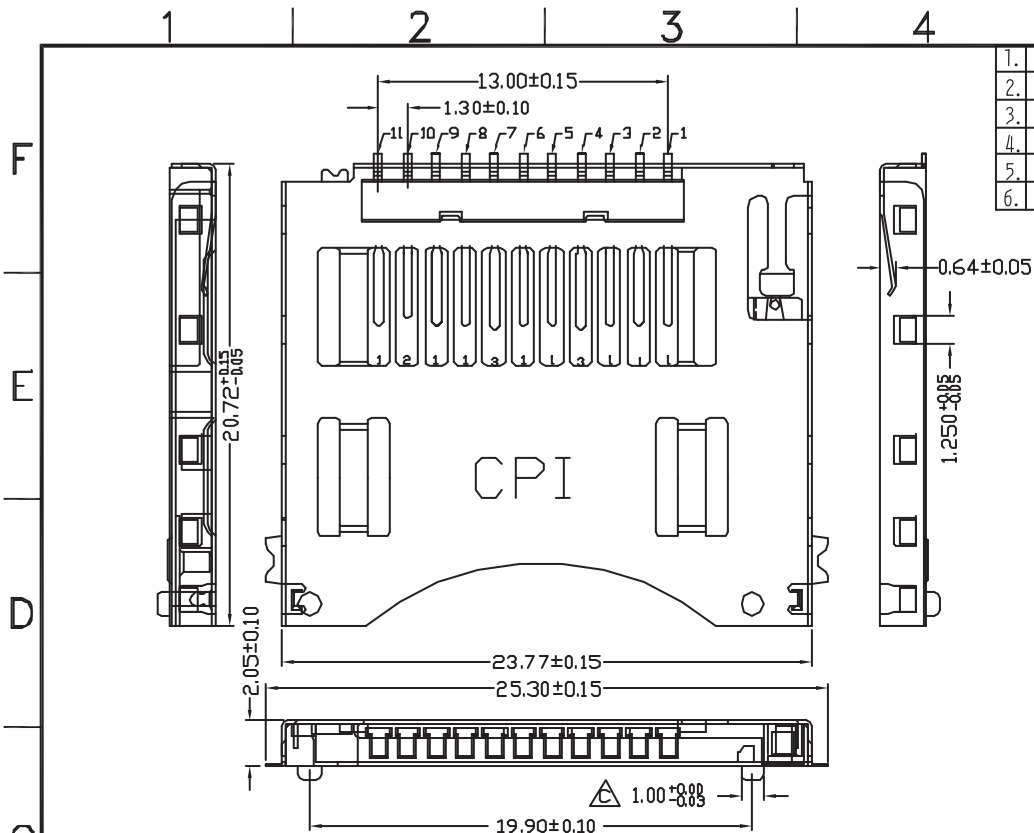


1.	DAT1	MIDDLE	7.	NC	MIDDLE	REV	MODIFICATION	DATE	DRAW
2.	DAT0	MIDDLE	8.	VSS	LONG				
3.	VSS	MIDDLE	9.	GND	MIDDLE				
4.	CLK	MIDDLE	10.	CD/DAT3	SHORT				
5.	VDD	LONG	11.	DAT2	MIDDLE				
6.	NC	MIDDLE							

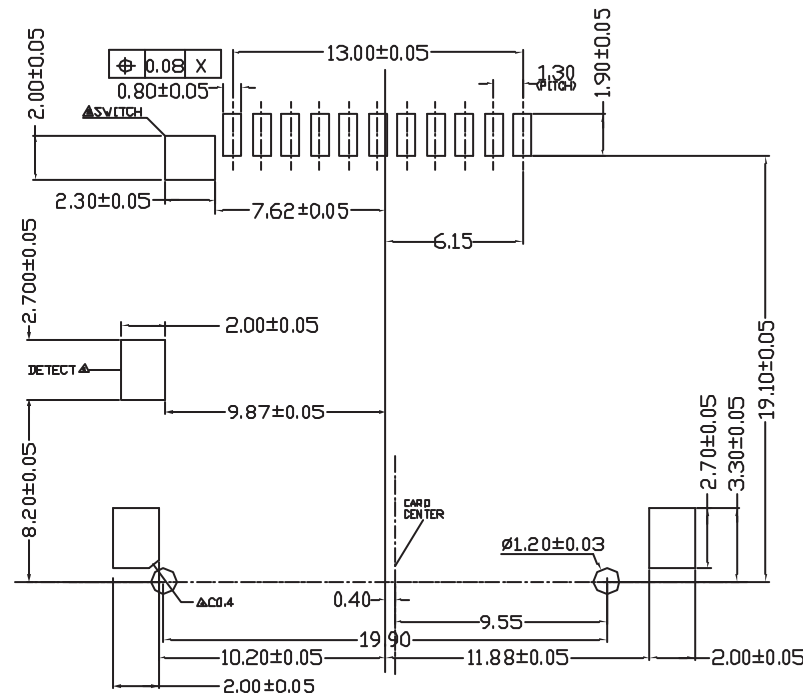

NOTES:  
 MATERIAL  
 HOUSING:HIGH TEMPERATURE THERMOPLASTIC  
 CONTACT: COPPER ALLOY  
 SHELL: COPPER ALLOY  
 PLATING  
 CONTACT AREA: GOLD PLATED OVER NI  
 SOLDER TAIL: 100u" MIN Sn/Pb PLATED OVER NI  
 SHELL SOLDER AREA: GOLD PLATED OVER NI  
 PATING  
 CURRENT RATING: 0.5A  
 VOLTAGE RATING: 250VRMS  
 OPERATING  
 TEMPERATURE: -25C~+90C  
 SPECIFICATION  
 CONTACT RESISTANCE: 40 MILLIOHMS  
 DIELECTRIC WITHSTANDING VOLTAGE: 500VAC MEGOHMS  
 INSULATION RESISTANCE: 100 MEGOHMS  
 ORDERING INFORMATION  
 MDDMF-111 XX B000  
 05:tin/gold 5u"

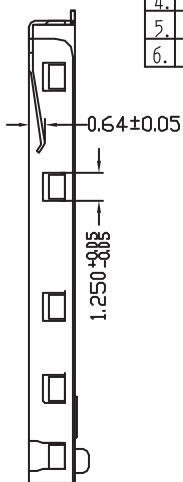

P.C.B layout

DIMENSION IN mm [inch]		PROD. SPEC.	ALMITA CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE MINI SD 2.05	
.X±0.30 X'±1"		APPROVE	CUSTOMER DRAWING	
.XX±0.20 .X'±0.5"		CHECK	FILE NO.	DWG NO. MDDMF-111XXB000
.XXX±0.10 .XX'±0.25"		DRAW	SIZE A4	PROJ. SHEET 1 / 1
			SCALE 3:1	REV A