

4

3



2

1

PART NO. SEE TABLE

REVISIONS			
LTR	DESCRIPTION	Drawing	DATE
A	Initial Release for Manufacture	GARY	08/15/07
E	增加拘料	GARY	02/28/08
F	增加LCP料號	GARY	03/06/09

CUSTOMER DRAWING

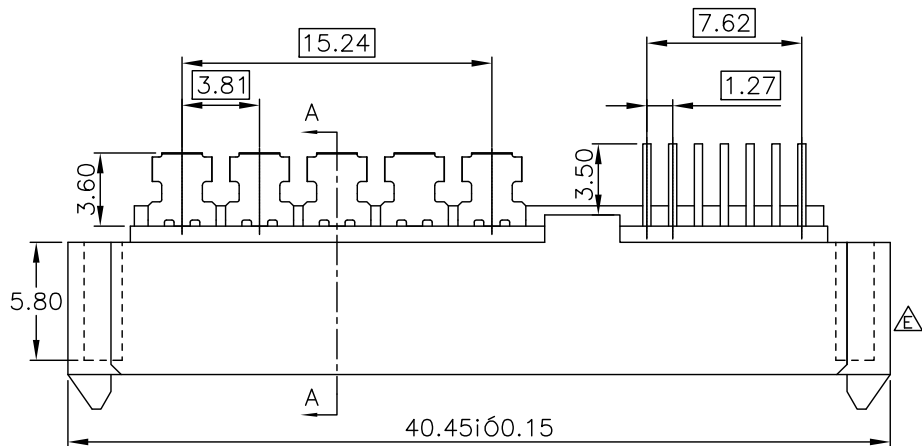

TABLE

△	PART NO.	PLATED	PLASTIC&COLOR	NOTE
	007-01-00854	GOLD FLASH	LCP BLACK	GP
	007-01-00466	15 U" GOLD	PA9T BLACK	ROHS
	007-01-00465	15 U" GOLD	PBT BLACK	RoHS/GP
	007-01-00537	GOLD FLASH	PBT BLACK	RoHS/GP

NOTE:

1.MATERIAL :

BASE&COVER: PA9T&PBT , G.F.30%, UL94V-0,
 TERMINAL(max): PHOSPHOR BRONZE,C5191-H
 THICKNESS = 0.30 mm



TERMINAL(3 IN 1): PHOSPHOR BRONZE,C5210-EH
 THICKNESS = 0.30 mm

2.PLATING:


CONTACT:15u" min GOLD PLATED ON CONTACT AREA.
 150u" min MISTY TIN PLATED ON SOLDERING END OVER
 75u" min NICKEL UNDER-PLATING.

3.ELECTRONICAL SPECIFICATION:

CURRENT RATING: 1.5 AMPERE PER CONTACT
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 INSULATION RESISTANCE: 1000 MEGOHMS MIN.
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC.
 OPERATING TEMPERATURE: -40°C~+85°C

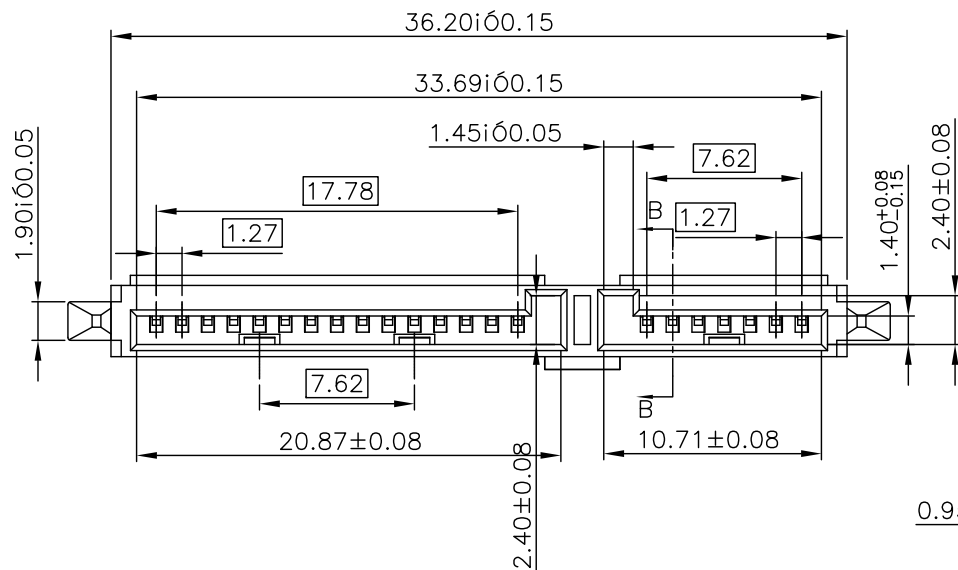

SECTION A-A

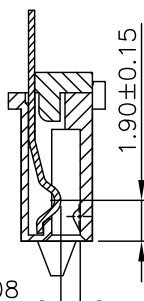

SECTION B-B

DIMENSION ARE MILLIMETERS TOLERANCES ARE : DECIMALS .X ± 0.20 .XX ± 0.15 ANGLE: X ± 3'	APPROVALS		DATE	TITLE: SATA 22P Socket SOLDER WITHOUT POST
	DRAWN	GARY	03/06/09	
	CHECKED			
	APPROVALS			
	SIZE mm	SCALE : 1 : 1	DRAWING NO. 000517	REV. F
	ID NO.	XXXXXXXXXX	SHEET 1 OF 1	

DESCRIPTION

QTY UNIT DO NOT SCALE DRAWING

4

3

2

1