


CUSTOMER DRAWING

REVISIONS			
LTR	DESCRIPTION	Drawing	DATE
A	RELEASE NEW PRODUCT	GARY	05/26/07
B	修改塑膠結構	GARY	07/11/07
C	修改塑膠尺寸11.35TO 11.15	GARY	08/14/07

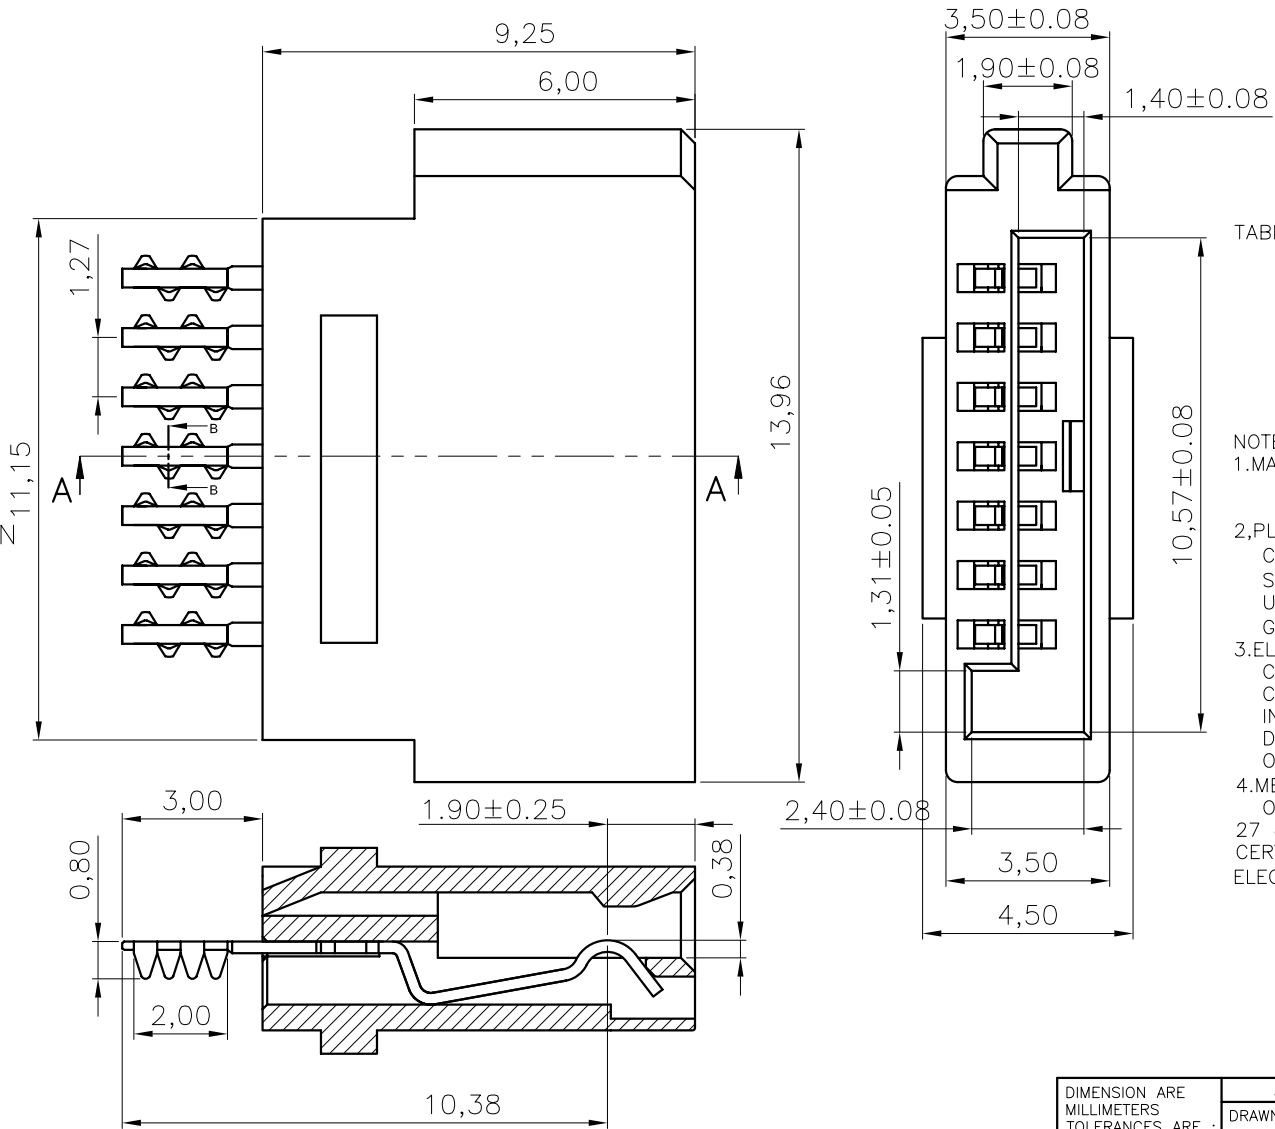

TABLE

007-01-00426	GOLD FLASH	PBT BLACK
007-01-00427	15 U" GOLD	PBT BLACK
PART NO.	PLATED	PLASTIC&COLOR

NOTE:

- MATERIAL :
BASE : HIGH TEMPERATURE THERMOPLASTIC UL94V-0,
TERMINAL: COPPER ALLOY, THICKNESS = 0.30 mm
- PLATING:
CONTACT: GOLD OVER 50u" MIN NICKEL UNDERPLATE
SOLDER TAIL: 150u" MIN MISTY TIN 50u" MIN NICKEL UNDERPLATE
GOLD SPECIFICATION: a, GOLD FLASH; b 15u" GOLD; c, 30u" GOLD
- ELECTRONICAL SPECIFICATION:
CURRENT RATING: 1.5 AMPERE PER CONTACT
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VDC.
OPERATING TEMPERATURE: -40°C~+85°C
- MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (ROHS)

DIMENSION ARE MILLIMETERS TOLERANCES ARE : DECIMALS .X ± 0.20 .XX ± 0.15 ANGLE: X ± 1°	APPROVALS		DATE	PART NO.
	DRAWN	GARY	08/14/07	007-01-00427/00428
	CHECKED			TITLE:
	APPROVALS			SATA-7P CLIM PIN FOR 30 AWG
	SIZE	SCALE :	DRAWING NO.	REV.
	mm	1 : 1	000490	C
NO	DESCRIPTION			ID NO. XXXXXXXXXX
	QTY	UNIT	DO NOT SCALE DRAWING	
			SHEET 1 OF 1	