
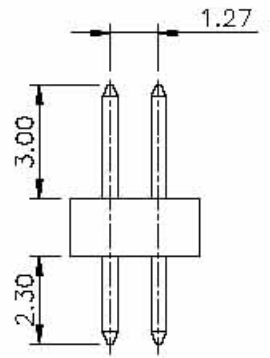
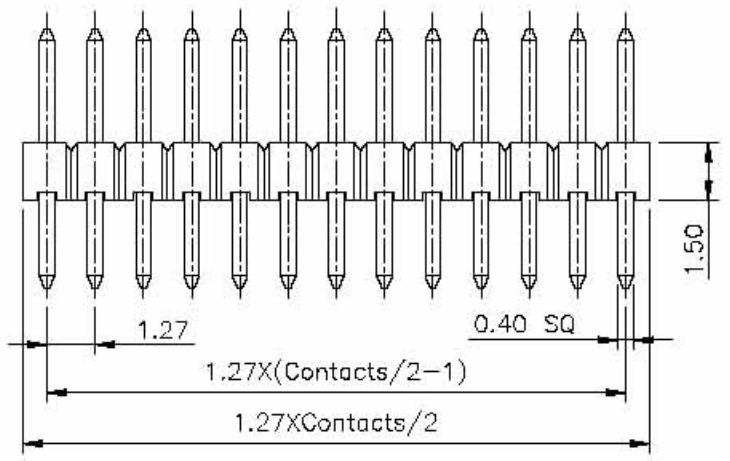
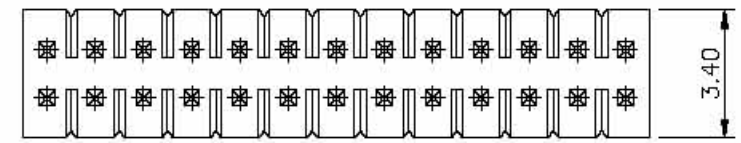



1 2 3 4 5



Specifications:
 Current Rating:1.0A AC/DC
 Voltage Rating:50V AC/DC
 Contact Resistance:20m ohm. max.
 Insulation Resistance:1,000M ohm. min.
 Withstanding Voltage:500V For One Minute
 Operating Temperature Range:-25°C ~ +105°C
 Material and Finish
 Insulator:High Temp. Plastic(Nylon 6T UL94V-0)
 Insulator Color:Black
 Contact:Copper Alloy
 Plated:Gold Plated

How To Order
 2199SB-XXG-301523

Length
 G: Gold Plated
 No. of Position
 Straight Double Row

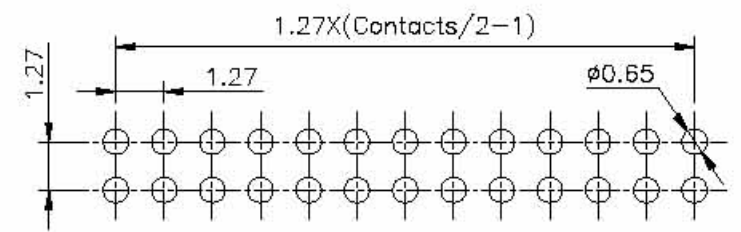

PCB Layout

RoHS Compliant

				DRAWN: Cel King	GENERAL TOLERANCE: .X=±0.25 .XX=±0.20		
E							
D				CHECKED: Jeremy Liu	UNIT: mm	DESCRIPTION: 1.27mm Pin Header Straight Double Rows	SIZE
C	18-Apr-2008	Add RoHs Mark	ZHW		SCALE:		A4
B	03-06-2002		Jerry Chen		SHEET: 1 / 1	PART NO: 2199SB-XXG-301523	
A	03-05-2002	(PC0001)	Jerry Chen	APPROVAL: Mike Wu	PROJECTION:		
REV	DATE	FILE	BY				