


1

2

3

4

5



Specifications:

Current rating:2.0A AC/DC

Voltage rating:250V AC/DC

Contact resistance:20m ohm max.

Withstanding Voltage:500V AC/minute

Insulation resistance:1000M ohm min.

Operating Temperature Rating:-40°C ~ +105°C

Materials:

Insulator:High Temp Plastic (PBT UL94V-0)


Standard Color:Black

Contact:Copper Alloy

Plating:Gold Plated




How To Order

2210S-XXG

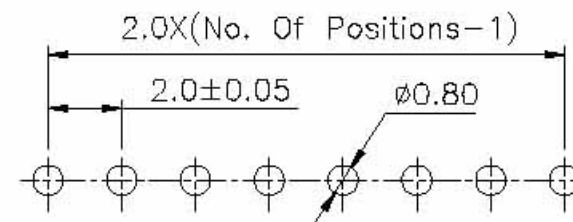

PCB Layout

RoHS Compliant

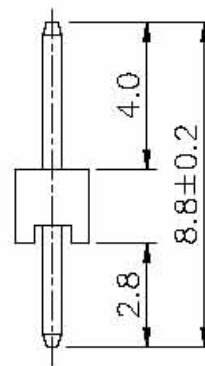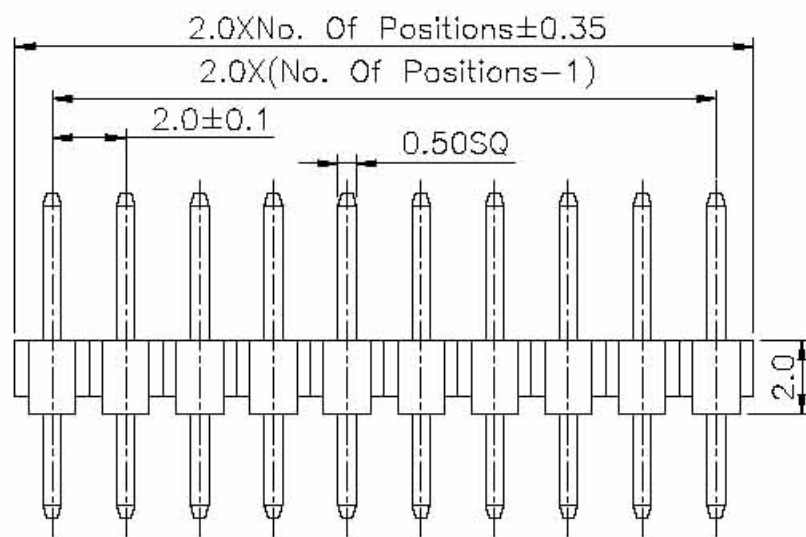

F				DRAWN:	GENERAL TOLERANCE:		
E				Cel King	.X=±0.20		
D				CHECKED:	.XX=±0.15		
C				Jeremy Liu	UNIT: MM	DESCRIPTION:	SIZE
B				APPROVAL:	SCALE: 1:1	2.0mm Pin Header Straight Type	A4
A	04-Nov-2005	(PC0001)	Cel King	Mike Wu	SHEET: 1 / 1	PART NO:	
REV	DATE	FILE	BY		PROJECTION:	2210S-XXG	