


Dimension :

Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B		A	B		A	B
2	5.58	2.54	22	58.38	53.34	12	30.98	27.94	32	81.78	78.74
3	8.12	5.08	23	58.92	55.88	13	33.52	30.48	33	84.32	81.28
4	10.66	7.62	24	61.46	58.42	14	36.06	33.02	34	86.86	83.82
5	13.20	10.16	25	64.00	60.96	15	38.60	35.56	35	89.40	86.36
6	15.74	12.70	26	66.54	63.50	16	41.14	38.10	36	91.94	88.90
7	18.28	15.24	27	69.08	66.04	17	43.68	40.64	37	94.48	91.44
8	20.82	17.78	28	71.62	68.58	18	46.22	43.18	38	97.02	93.98
9	23.36	20.32	29	74.16	71.12	19	48.76	45.72	39	99.56	96.52
10	25.90	22.86	30	76.70	73.66	20	51.30	48.26	40	102.10	99.06
11	28.44	25.40	31	79.24	76.20	21	53.84	50.80			



Specifications:


Current Rating: 3.0A AC/DC
 Voltage Rating: 250V AC/DC
 Contact Resistance: 20m ohm. Max.
 Insulation Resistance: 1,000M ohm. Min.
 Withstanding Voltage: 600V AC For One Minute
 Operating Temperature Range: -40°C to +105°C
 Material and Finish

Insulator: High Temp. Plastic (PBT UL94V-0)
 Standard Color: Black
 Contact: copper Alloy
 Plated: Gold Plated

How To Order:

2212R-XXG-85-F1

- Lead Free
- Plastic Height 8.5mm
- Gold Plated
- No. Of Contact
- R: Right Angle

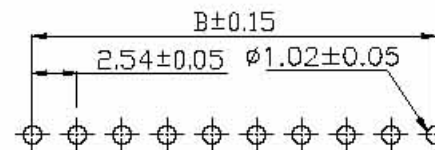

P.C.B. Layout

RoHS Compliant

E				DRAWN:	GENERAL TOLERANCE:		
D				Jeremy Liu	.X=±0.2		
C				CHECKED:	.XX=±0.15		
B				Jerry Chen	UNIT: MM	DESCRIPTION:	SIZE
A	15-Jun-2006	(PC0001)	Jeremy Liu	APPROVAL:	SCALE:	2.54mm PCB Socket Single Row R/A Type	A4
REV	DATE	FILE	BY	Mike Wu	SHEET: 1 / 1	PART NO:	
					PROJECTION:	2212R-XXG-85-F1	