

Dimension :



Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B		A	B		A	B
2	5.58	2.54	12	30.98	27.94	22	56.38	53.34	32	81.78	78.74
3	8.12	5.08	13	33.52	30.48	23	58.92	55.88	33	84.32	81.28
4	10.66	7.62	14	36.06	33.02	24	61.46	58.42	34	86.86	83.82
5	13.20	10.16	15	38.60	35.56	25	64.00	60.96	35	89.40	86.36
6	15.74	12.70	16	41.14	38.10	26	66.54	63.50	36	91.94	88.90
7	18.28	15.24	17	43.68	40.64	27	69.08	66.04	37	94.48	91.44
8	20.82	17.78	18	46.22	43.18	28	71.62	68.58	38	97.02	93.98
9	23.36	20.32	19	48.76	45.72	29	74.16	71.12	39	99.56	96.52
10	25.90	22.86	20	51.30	48.26	30	76.70	73.66	40	102.1	99.06
11	28.44	25.40	21	53.84	50.80	31	79.24	76.20			

Specifications:

Current Rating: 3.0A AC/DC  
 Voltage Rating: 250V AC/DC  
 Contact Resistance: 20m ohm. max.  
 Insulation Resistance: 1000M ohm. min.  
 Withstanding Voltage: 600V AC For One Minute  
 Operating Temperature Range:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$   
 Material and Finish  
 Insulator: High Temp. Plastic (PBT UL94V-0)  
 Insulator Color:Black  
 Contact: Copper Alloy  
 Finish: Gold Plated

How To Order:

2212S-XXG-85-F1

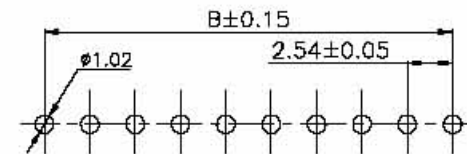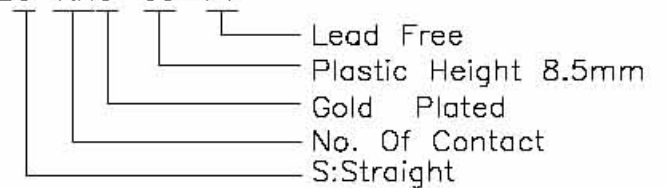

P.C.B. LAYOUT

RoHS Compliant

E				DRAWN:	GENERAL TOLERANCE:		
D				CJH	.X=±0.2		
C				CHECKED:	.XX=±0.15		
B	06-Dec-2006	ECN-CN061205	Wendy	Jeremy Liu	UNIT: MM	DESCRIPTION:	SIZE
A	28-Oct-2005	(PC0001)	Cel King	APPROVAL:	SCALE:	2.54mm PCB Socket Single Row Straight	<b>A4</b>
REV	DATE	FILE	BY	Mike Wu	SHEET: 1 / 1	PART NO:	
					PROJECTION:	2212S-XXG-85-F1	