


Specifications:
 Current Rating:3.0A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:20mohm Max
 Insulation Resistance:1000Mohm Min.
 Withstanding Voltage:1000V AC/minute
 Operating Temperature Range:-40°C~+105°C
 Material And Finish:
 Insulator:High Temp. Plastic(Nylon 66 UL94V-0)
 Insulator Color:Beige
 Contact:Brass
 Plating:Tin Plated
 How To Order
 2217S-XX-F4

Lead Free
 No.Of Contacts
 S: Straight Type

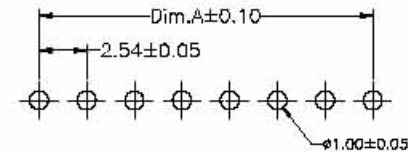

PCB LAYOUT

Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
02	2.54	5.08	12	27.94	30.48
03	5.08	7.62	13	30.48	33.02
04	7.62	10.16	14	33.02	35.56
05	10.16	12.70	15	35.56	38.10
06	12.70	15.24	16	38.10	40.64
07	15.24	17.78	17	40.64	43.18
08	17.78	20.32	18	43.18	45.72
09	20.32	22.86	19	45.72	48.26
10	22.86	25.40	20	48.26	50.80
11	25.40	27.94			

RoHS Compliant

				DRAWN: Cel King	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		
				CHECKED: Jeremy Liu	UNIT: MM SCALE:1:1	DESCRIPTION: 2.54mm Wire to Board Wafer Straight Type	SIZE
A	16-Dec-2005	(PC0040)	Cel King	APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: 2217S-XX-F4	A4
REV	DATE	FILE	BY		PROJECTION:		