


USB A Type Male Reverse SMD Type

5075ARRP Series

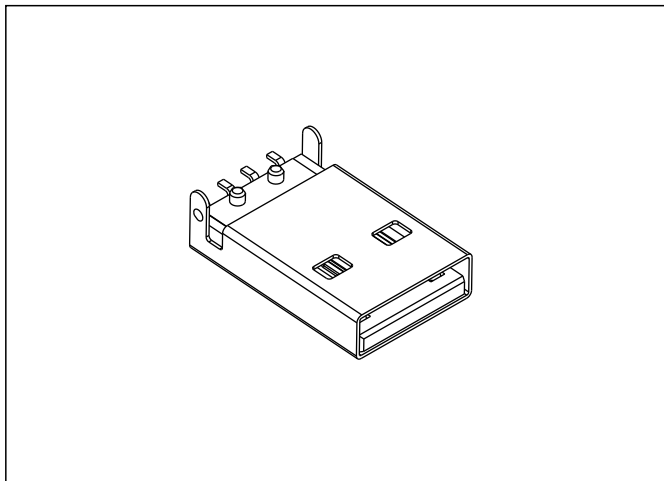


■ Specifications

Current rating:1.0AAC/DC
 Voltage rating:30V AC/DC
 Contact resistance:20m ohm. max.
 Insulation resistance:1000M ohm. Min.
 Withstanding voltage:750V AC for one minute
 Operating temperature range:-40°C to +105°C

■ Material and Finish

Insulator:High Temp. Plastic(UL94V-0)
 Contact:Copper Alloy
 Plating:Selective Gold Plated

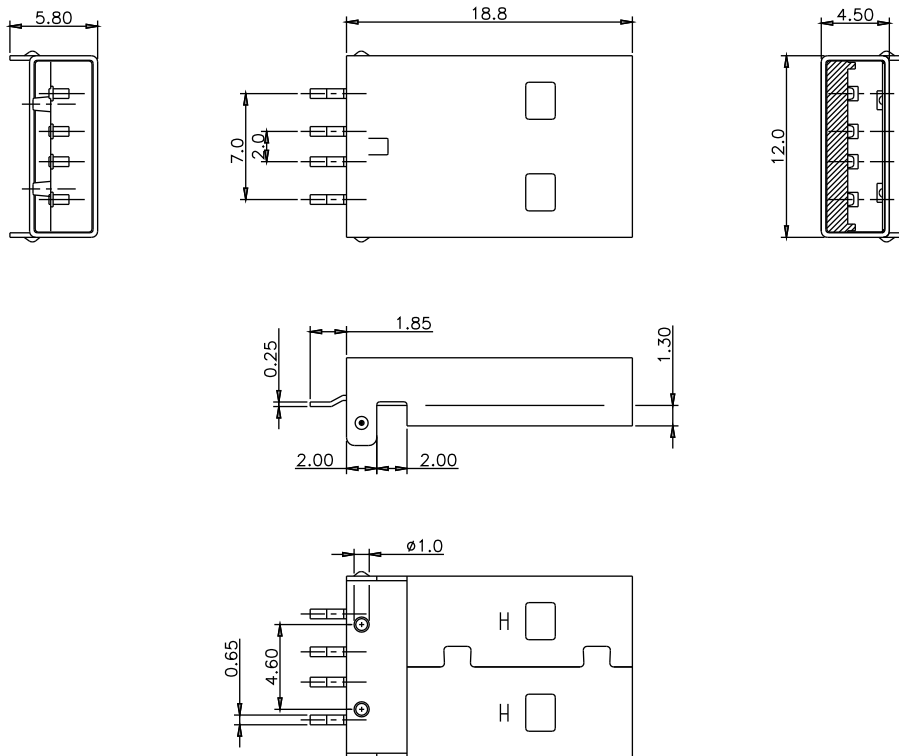


■ Ordering Information

5075ARRP-04-SM1

① ② ③

① A Type Male (Reverse)	② No. Of Contacts	③ SMD Type 1
-------------------------	-------------------	--------------

■ Recommended PCB Layout



Unit:mm