


1

2

3





4

5



Specifications:
 Current Rating:1.0 AC/DC
 Voltage Rating:30V AC/DC
 Contact Resistance:20m Ohm. Max.
 Insulation Resistance:1,000M Ohm. Min.
 Withstanding Voltage:750V AC For One Minute
 Operating Temperature Range:-40°C ~ +105°C
 Materials And Finish:
 Insulator:PBT(UL94V-0)
 Contact:Copper Alloy
 Contact Plating:Gold Plated On Contact and 100U”
 Tin Plated On Solder Tail Over Nickel Plated
 Shell:Copper Alloy With Nickel Plated
 How To Order
 5075AUR-04-XX-F1

RoHS
 WH:White
 BK:Black
 No. of Positions
 A Type Flank R/A

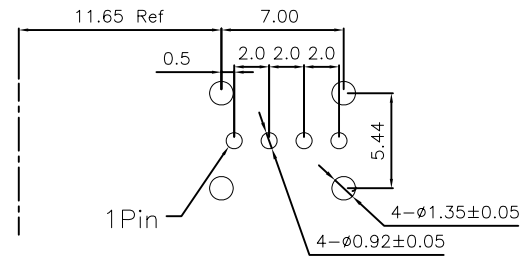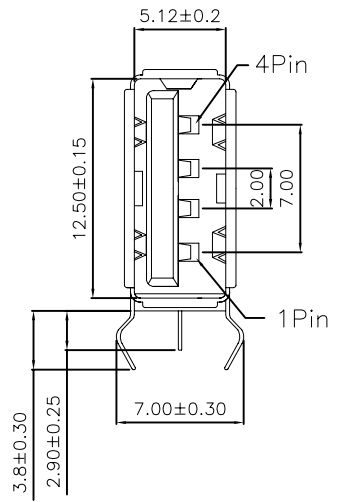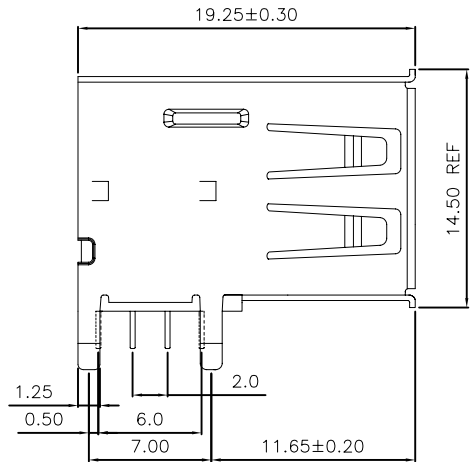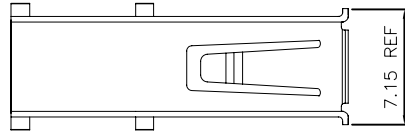

Recommend P.C.B. Layout

RoHS Compliant

				DRAWN: P.D.J	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		
E				CHECKED: Jeremy Liu	UNIT: MM	DESCRIPTION: USB-A Type Female Flank 90° Dip Type	SIZE A4
D							
C				APPROVAL: Mike Wu	SCALE:	PART NO: 5075AUR-04-XX-F1	D
B					SHEET: 1 / 1		
A	21-Mar-2008	(PC0420)	P.D.J		PROJECTION:		
REV	DATE	FILE	BY				